



FEX[®]-A

The window frame-drilling screw

*for fastening single-walled
uPVC profiles.*



FEX[®]-A:
***Coarse thread with ground
serrations***

- Flat head with ribs, drill point.
- For uPVC profiles with reinforcement fitted up against the reinforcement chamber.
- The ribbed head underside makes countersinking the screw flush to the surface easier.




The window frame-drilling screw

for fastening single-walled uPVC profiles.

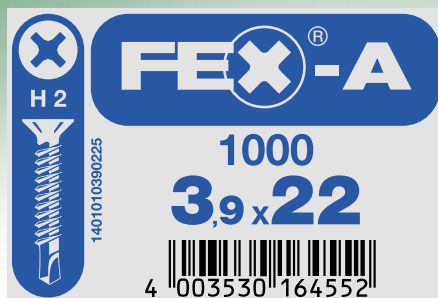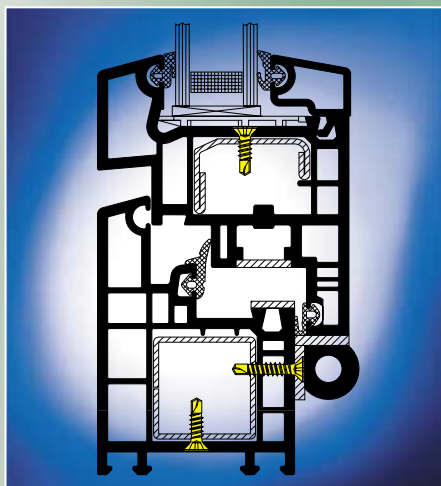

Surfaces

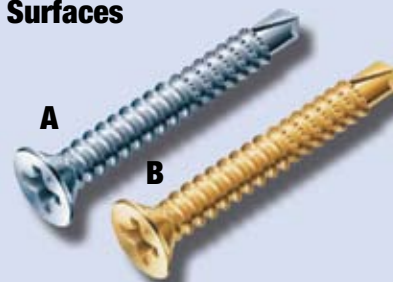


- A Special surface, silver
- B Galvanised with yellow passivation

Other surface treatments as well as RAL colours available on demand.

FEX-A Flat head with ribbed underside

Metal core fastening in single-walled profiles

Phillips PH 2

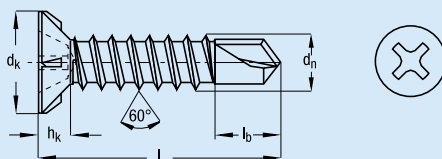

Dimensionst					Torque transfer	Packing sizet	
Nominal diameter d_n [mm]	Length l [mm]	Drill point length l_b [mm]	Head diameter d_k [mm]	Head height h_k [mm]	Bit size	ABC box [in pcs]	Packing carton [in pcs]
3,9	13	4,5	7,5	2,3	H 2	1.000	10.000
3,9	16	4,5	7,5	2,3	H 2	1.000	10.000
3,9	19	4,5	7,5	2,3	H 2	1.000	10.000
3,9	22	4,5	7,5	2,3	H 2	1.000	10.000
3,9	25	4,5	7,5	2,3	H 2	1.000	10.000
3,9	32	4,5	7,5	2,3	H 2	1.000	10.000
3,9	38	4,5	7,5	2,3	H 2	1.000	10.000

Metal core fastening for single-wall profiles

The window frame-drilling screw for fastening single-walled uPVC profiles with reinforcement fitted up against the reinforcement chamber. The ribbed head underside makes countersinking the screw flush to the surface easier.

- **Corrosion protection:**
Equivalent to window fastenings familiar to the market.
- **Point:**
Drill point for ideal drilling performance in manual and automatic operation.

SPAX UK Ltd.

ALTENLOH, BRINCK & CO - GROUP

UNIT 9 · CALIBRE INDUSTRIAL ESTATE · LACHES CLOSE
FOUR ASHES · WOLVERHAMPTON · WEST MIDLANDS · WV10 7DZ · GREAT BRITAIN
TEL +44 (0) 1902-70 33 55 · FAX -70 33 59 · uk@spax.com · www.spax.com