



FEX[®]-KS

Countersunk head fitting screw

*for fastening fittings
to plastic profiles*


FEX[®]-KS:

***Fitting screw with deep
special thread***

- No over-tightening
- Flush countersinking
- Self-drilling point
- Chamfered head flanks and braking ribs


Countersunk head fitting screw

for fastening fittings to plastic profiles

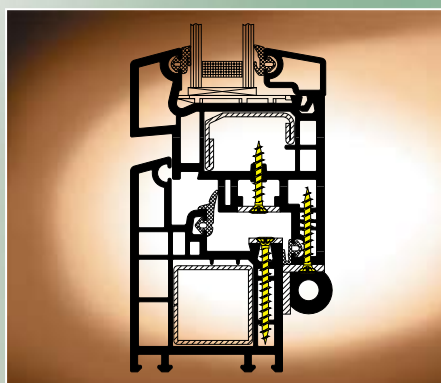

FEX[®]-KS countersunk head

Fitting screw
for plastic profiles

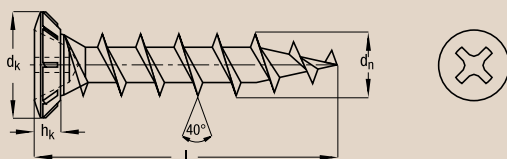


Cross recess H 2

Dimensions				Recess	Pack size	
Nom. Ø d _n [mm]	Length l [mm]	Head Ø d _k [mm]	Head height h _k [mm]	Bit size	ABC box [quantity]	Master carton [quantity]
4,0	16	7,0	2,4	H 2	1.000	10.000
4,0	20	7,0	2,4	H 2	1.000	10.000
4,0	22	7,0	2,4	H 2	1.000	10.000
4,0	25	7,0	2,4	H 2	1.000	10.000
4,0	30	7,0	2,4	H 2	1.000	10.000
4,0	35	7,0	2,4	H 2	1.000	10.000
4,0	40	7,0	2,4	H 2	1.000	10.000
4,0	45	7,0	2,4	H 2	500	5.000
4,0	55	7,0	2,4	H 2	500	5.000
Repair screw for plastic profiles						
5,0	25	7,0	2,4	H 2	1.000	10.000
5,0	40	7,0	2,4	H 2	500	5.000



The 5 mm nominal diameter window drill screw is used for strengthened fastening of fittings to plastic profiles as well as for repairs in cases where the fitting screw has been over-tightened.

Finishes

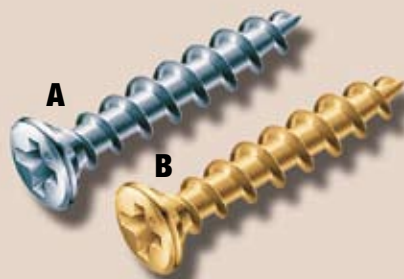

- A Special silver finish
- B Zinc plated, yellow passivated

Other finishes and RAL coated heads available on request.

Fitting screw for plastic profiles

Window drill screw for fastening fittings to plastic profiles

Head:

- Special countersunk head with chamfered flanks and braking ribs below the head. The special design ensures that the head is properly driven home. The braking ribs increase the over-tightening torque, thus preventing over-tightening, especially in connection with thin-walled plastic profiles.

Thread:

- Deep special thread extending to the base of the head, with large pitch.

Corrosion protection:

- Equivalent to that of popular windows fittings.

Point:

- Extended sharp self-drilling point forms a collar of material that effectively increases the size of the thread bite. This provides even greater protection against over-tightening, especially in non-stiffened thin-walled plastic profiles.

SPAX UK Ltd.

ALTENLOH, BRINCK & CO - GROUP

UNIT 9 · CALIBRE INDUSTRIAL ESTATE · LACHES CLOSE
FOUR ASHES · WOLVERHAMPTON · WEST MIDLANDS · WV10 7DZ · GREAT BRITAIN
TEL +44 (0) 1902-70 33 55 · FAX -70 33 59 · uk@spax.com · www.spax.com