



**FEX<sup>®</sup>-P**

## **Profile assembly screw**

*for joining plastic profiles*

**FEX<sup>®</sup>-P:**  
*Assembly screw with  
coarse thread and ground  
serrations*

- Flat countersunk head screw with ground serrations
- With cap
- Equipped with self-centering point




## Profile assembly screw

with cap for joining plastic profiles.


The **FEX®-P** profile assembly screw is a simple and efficient fastening device for the joining of PVC frame profiles. After the frame elements have been joined, aligned and secured, a 4-mm hole is drilled into the first reinforcement layer of the subframe.

The two frames are then secured to each other with **FEX®-P** screws that provide a permanent and flush joint thanks to the 25-mm ground thread.

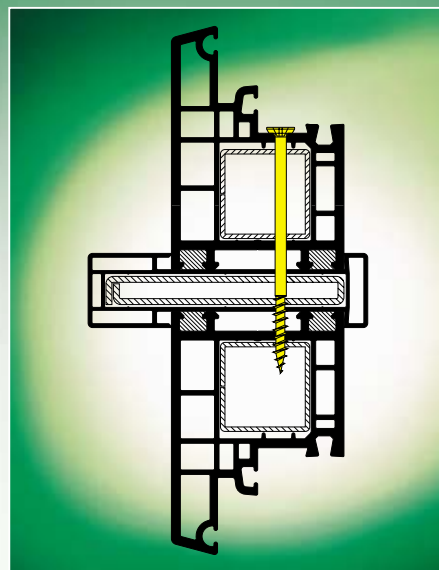

### FEX®-P profile assembly screw

Phillips H 2

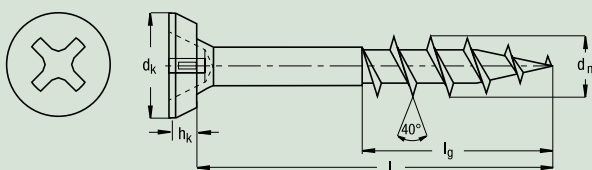

Dimensions					Recess	Pack size	
Nom. Ø	Length	Thread length	Head Ø	Head height	Bit size	ABC box	Master carton
$d_n$ [mm]	$l$ [mm]	$l_g$ [mm]	$d_k$ [mm]	$h_k$ [mm]		[quantity]	[quantity]
5,0	65	25	9,4	2	H 2	200	2.000
5,0	80	25	9,4	2	H 2	200	2.000
5,0	95	25	9,4	2	H 2	200	2.000

Other dimensions available on request.

### ABC plastic caps



### Assembly screw with cap for joining plastic profiles.

- **Thread:**  
Special thread, 40° flank angle, with long threadless shank, for joining two profiles together.
- **Corrosion protection:**  
Zink plated, yellow galvanised, minimum plating thickness 8 µm.
- **Point:**  
Self-centering point for fast and reliable guidance.

**SPAX UK Ltd.**

ALTENLOH, BRINCK & CO - GROUP

UNIT 9 · CALIBRE INDUSTRIAL ESTATE · LACHES CLOSE  
FOUR ASHES · WOLVERHAMPTON · WEST MIDLANDS · WV10 7DZ · GREAT BRITAIN  
TEL +44 (0) 1902-70 33 55 · FAX -70 33 59 · uk@spax.com · www.spax.com