

SPAX[®]



Everything for your deck

SPAX[®]-D makes screwing easy.





Step 1:

Drill the boards and sub-structure with a SPAX® Ø 3.5 mm wood drill. Use the complete length of the drill. Use the highest possible speed (around 3,000 rpm).



Step 2:


Drive the SPAX®-D straight in with a SPAX® T-STAR plus T25 bit. Drive it in without stopping until the head is flush.



Result:

Perfect look thanks to the cylindrical screw head. No splitting of the wood even close to the edge.

The fixing thread ensures a tight join between the wooden parts (vice effect).

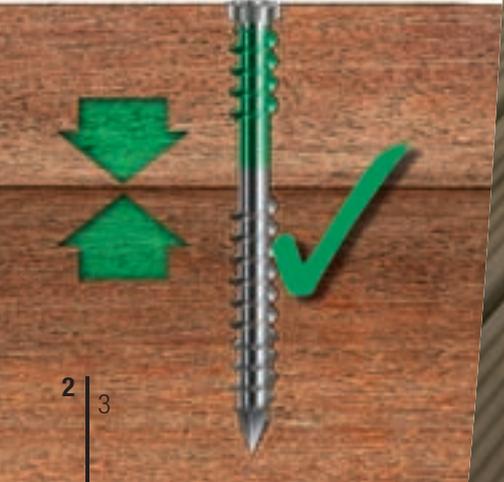

SPAX®-D A2


The unique decking screw for wooden terraces.

SPAX®-D: The outdoor decking screw with three way action.

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight



| Dimensions [mm] | | | | Packaging units | Product code |
|-----------------|--------------------|------------------------------|---------------|--------------------------|---------------|
| Thread Ø d1 | Total length Ls | Partial thread length LgT | Bit size T | SPAX® BOX [pieces] | |
| 5,0 | 40 | 22,5 | 25 | 200 | 0537000500403 |
| | 50 | 22,5 | 25 | 200 | 0537000500503 |
| | 60 | 27,5 | 25 | 100 | 0537000500603 |
| | 70 | 32,5 | 25 | 100 | 0537000500703 |
| | 80 | 37,5 | 25 | 100 | 0537000500803 |

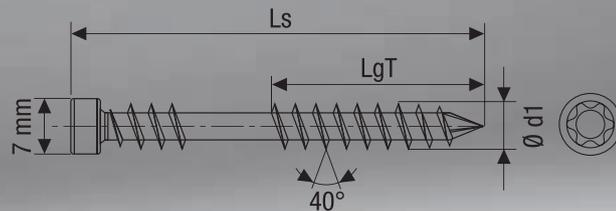

Cylindric head:
Sits flush in the wood.

Fixing thread:
Two wooden planks are drawn close together – the upper plank will not come loose.

Ground serrations:
Ease in turning the screw into the wood right up to the point.

CUT point:
Prevents wood splitting by gripping immediately.

* We recommend pre-drilling in hardwoods





Step 1:

Drill the boards and sub-structure with a SPAX® Ø 3.5 mm wood drill. Use the complete length of the drill. Use the highest possible speed (around 3,000 rpm).



Step 2:


Drive the SPAX®-D straight in with a SPAX® T-STAR plus T25 bit. Drive it in without stopping until the head is flush.



Result:

Perfect look thanks to the cylindrical screw head. No splitting of the wood even close to the edge.

The fixing thread ensures a tight join between the wooden parts (vice effect).

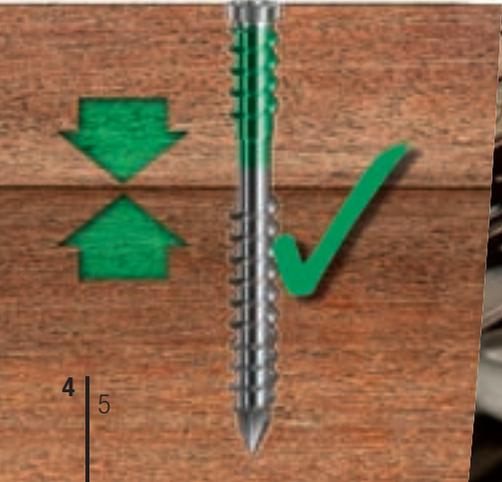


SPAX®-D A4

*The unique decking screw for wooden terraces.
Particularly well suited for coastal areas.*

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight
- Permanent protection against corrosion



| Dimensions [mm] | | | | Packaging units | Product code |
|-----------------|--------------------|------------------------------|---------------|--------------------------|---------------|
| Thread Ø d1 | Total length Ls | Partial thread length LgT | Bit size T | SPAX® BOX [pieces] | |
| 5,5 | 40 | 22,5 | 25 | 200 | 0538000550403 |
| | 50 | 22,5 | 25 | 200 | 0538000550503 |
| | 60 | 27,5 | 25 | 100 | 0538000550603 |
| | 70 | 32,5 | 25 | 100 | 0538000550703 |
| | 80 | 37,5 | 25 | 100 | 0538000550803 |

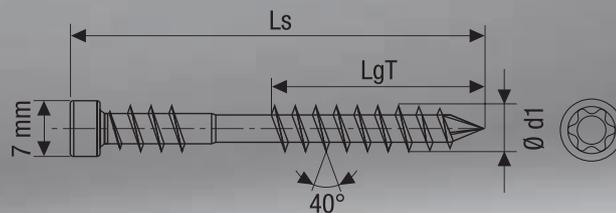

Cylindric head:
Sits flush in the wood.

Fixing thread:
Two wooden planks are drawn close together – the upper plank will not come loose.

Ground serrations:
Ease in turning the screw into the wood right up to the point.

CUT point:
Prevents wood splitting by gripping immediately.

* We recommend pre-drilling in hardwoods





NEW

The additional make the difference.

SPAX®-D Pads



- Protects the wood sub-structure from rising damp.
- Dimensions: 100 x 100 x 8 mm
- 25 pieces bundled
- Sales unit 10 x 25 pieces per outer box
- Art. No. 5000009186609

SPAX®-D Set



- HSS hard wood drill with centering tip
- Hard wood drill diameter 3.5 mm and **SPAX®-BITS T-STAR plus T25** and instructions
- Pre-drilling in crest or groove
- No pre-countersinking required
- 1 set in a bag
- Sales unit 10 piece sets per outer box
- Art. No. 5000009186709

SPAX®-D Spacer



- Joint gauge for 4 joint widths: 4 - 5 - 6 - 7 mm
- Check the deck board manufacturers recommended spacing
- 12 spacers in a handy re-usable plastic tub
- Sales unit 3 tubs per outer box
- Art. No. 5000009186209

SPAX®-D Wrench



- For simple alignment of warped cover boards
- Reversible grip for use in both directions
- 2 setting positions enable use with the majority of floor beam widths
- Sales unit 1 tool in a box
- Art. No. 5000009186309

SPAX®-D Cover tape



- Protects the wood sub-structure from rain
- Dimensions: 20 m x 76 mm on a roll
- Sales unit 2 rolls per outer box
- Art. No. 5000009186409
- Dimensions: 20 m x 115 mm on a roll
- Sales unit 2 rolls per outer box
- Art. No. 5000009186509

SPAX[®]-D



T-STAR plus



Fixing thread



CUT point



Cylindric head

SPAX[®]-D:
*The outdoordecking
screw with three way
action:*

- Patented ground serrations on the lower thread remove the need for pre-drilling*
- Non threaded shank allows two materials to be pulled together tightly
- Upper thread locks the deck-board securely down tight

* We recommend pre-drilling in hardwoods

SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GRUPPE

KÖLNER STRASSE 71-77 · D-58256 ENNEPETAL
TEL + 49-(0) 23 33-799-0 · FAX + 49-(0) 23 33-799-199
info@spax.com · www.spax.com

